

# **G-Invoicing System Interface Specifications - Pull**

A Guide to extracting, packaging, and transmitting GT&C,  
Order and Performance data from G-Invoicing

***General Terms and Conditions (GT&C),  
Orders and Performance  
Version 7.1.2***

*February 2021*



## Table of Contents

<b>1</b>	<b>Introduction</b>	<b>3</b>
1.1	Purpose	3
1.2	Scope	3
1.3	References	3
<b>2</b>	<b>Assumptions/Constraints</b>	<b>4</b>
2.1	Assumptions	4
2.2	Constraints	4
<b>3</b>	<b>Interface Mechanism</b>	<b>4</b>
3.1	Physical Interface	4
3.2	Protocol	4
3.3	Supported Environments	13
<b>4</b>	<b>Interface Specification</b>	<b>13</b>
4.1	Processing Logic	13
4.2	Business Rules	14
4.3	File Naming Convention	14
4.4	Interface Timing	14
4.5	Retransmissions	15
4.6	Interface Data Details	15
<b>5</b>	<b>Error Specifications</b>	<b>18</b>
<b>6</b>	<b>Security</b>	<b>18</b>
<b>7</b>	<b>Interface Integrity</b>	<b>19</b>
7.1	TWAI	19
7.2	Communication Channel	19
<b>8</b>	<b>Revision History</b>	<b>20</b>
<b>Appendix A: Messaging Protocol &amp; Data Encapsulation</b>		<b>23</b>
<b>1</b>	<b>G-Invoicing Message Encapsulation</b>	<b>23</b>
1.1	HTTP Request	23
1.2	HTTP Response	23
<b>2</b>	<b>Call Detail</b>	<b>24</b>
<b>3</b>	<b>Document List</b>	<b>24</b>
<b>4</b>	<b>Error</b>	<b>25</b>

## 1 Introduction

### 1.1 Purpose

This artifact defines the interface specification to define the transmission of General Terms & Conditions (GT&C), Order and Performance data from the G-Invoicing application to Federal Program Agency systems. It serves as an agreement between G-Invoicing, agencies with interfacing systems, their software provider development teams and Bureau of the Fiscal Service business owners, upon which the system-to-system interface will be based.

### 1.2 Scope

This artifact defines the G-Invoicing specifications to extract, package and transmit GT&C, Order and Performance data and the communication channel that carries these messages. The focus is on the specifications that must be mutually agreed upon by G-Invoicing and agencies with interfacing systems. The G-Invoicing team owns the maintenance of this document.

### 1.3 References

The artifacts listed below support the current Production release of this specification and may be downloaded from the provided location. Artifacts that support future enhancements and releases of this specification can be made available upon request.

#### 1.3.1 The Federal Intragovernmental Data Standards (FIDS) for GT&C, Order and Performance Data Elements

[https://www.fiscal.treasury.gov/fsservices/gov/acctg/g\\_invoice/g\\_invoice\\_home.htm](https://www.fiscal.treasury.gov/fsservices/gov/acctg/g_invoice/g_invoice_home.htm)

#### 1.3.2 System Mapping and Validation Rules (SM&VR) for GT&C and Order, explains how each data element in the FIDS maps to G-Invoicing and the validation rules enforced for each change in status.

[https://www.fiscal.treasury.gov/fsservices/gov/acctg/g\\_invoice/g\\_invoice\\_home.htm](https://www.fiscal.treasury.gov/fsservices/gov/acctg/g_invoice/g_invoice_home.htm)

**Note:** *There is no SM&VR document for Performance data because there are not multiple, complex status scenarios to support. Validation rules appear in the Performance FIDS.*

#### 1.3.3 XML Schema Documentation

- GTC.xsd (payload)
- Documents Summary.xsd
- Error.xsd

The following schemas are used for Orders and Performance:

- Order\_Documents Summary.xsd
- Order\_Error.xsd
- Order.xsd (payload)
- Performance.xsd (payload)

<https://www.fiscal.treasury.gov/data/>

## 2 Assumptions/Constraints

### 2.1 Assumptions

1. While this artifact represents an agreement by G-Invoicing, Federal Program Agencies and their software providers, it does not imply a release schedule or project plan. Those topics are described by other artifacts for the respective projects and are not referenced here.
2. The interface is limited to the transmission of GT&C, Order and Performance data outbound from G-Invoicing to agencies with interfacing systems. Additional data types are not included in this interface at this time.

### 2.2 Constraints

1. This interface will be delivered via web services, access governed by the Treasury Web Application Infrastructure (TWA), as per agreement between FRB St Louis, the Department of the Treasury Bureau of the Fiscal Service and Defense Logistics Agency (DLA) Transaction Services, and is consistent with the Bureau of the Fiscal Service's desire to move towards delivering system-to-system interfaces via web services.
  - a. Similar operating agreements may be made with other agencies, as-needed.
2. Messages will be sent over the internet utilizing the HTTPS protocol.
3. The Bureau of the Fiscal Service reference data XML Schemas will be published by the Enterprise Data Architecture group at <https://www.fiscal.treasury.gov/data/>. These schemas will be used to format the payload portion of the data transmission.
  - a. XML namespaces may vary with each new schema version

## 3 Interface Mechanism

### 3.1 Physical Interface

The G-Invoicing to agency system interface will communicate using HTTPS with 2-way TLS (Transport Layer Security) using a client certificate through the TWA. The TWA will employ a web service proxy to serve as a focal route for incoming web service requests so that the web service provider is only configured to receive requests from a single point of origination. The web service response is routed back on the same stream to the initial requestor.

### 3.2 Protocol

The G-Invoicing to agency system interface will employ a push/pull model utilizing REST Services with an XML payload.

All services below are referenced via URLs in the following format.

<https://host-name:port/base-path/resource-path>

#### 3.2.1 Host names:

Production: ws.igt.fiscal.treasury.gov

Quality Assurance Current: qa.ws.igt.fiscal.treasury.gov

Quality Assurance Future: qaf.ws.igt.fiscal.treasury.gov

Functional Test: ft.ws.igt.fiscal.treasury.gov

**3.2.2** Base Path: /ginv

**3.2.3** Resource: /services

**Note:** G-Invoicing supports a one-to-many relationship between a Partner ID and a System ID whereby one Partner created and managed within a single agency account can represent multiple Systems spread across many agency accounts. Policy requires that at least one System ID must be created and managed in each agency account to push data. The Partner ID must be assigned a client certificate to access G-Invoicing.

3.2.3.1 Resource: GT&C List

Component	Detail / Description
Path	/ginv/services/v1_0/gtc/ (for single ALC per partner v2.1 XML schema) /ginv/services/v2_0/gtc/ (for 1-to-many ALCs per partner v3.0 XML schema)
Method	GET
Description	Returns a list of all GT&Cs from the System that the User is authorized to access.
Example	GET /ginv/services/v1_0/gtc?status=REC,CLZ GET /ginv/services/v2_0/gtc?status=REC,CLZ GET /ginv/services/v1_0/gtc?agencyLocationCode=17000001,17000002,17000003 &lastModifiedDateTime=2020-06-17T13:30:00.000-04:00 Host: <a href="https://ws.igt.fiscal.treasury.gov">ws.igt.fiscal.treasury.gov</a> Accept: application/xml Accept Encoding: gzip, deflate Connection: Keep-Alive
Parameters	<p><u>Name:</u> agencyLocationCode <u>Description:</u> Limits results to GT&amp;Cs which contains at least one of the passed ALCs. <u>In:</u> query <u>Type:</u> Comma separated array of strings <u>Required:</u> false</p>
	<p><u>Name:</u> status <u>Description:</u> Limits results of GT&amp;Cs associated with one of the passed status types. <u>In:</u> query <u>Type:</u> Comma separated array of strings, enumeration <u>Values:</u> "REC" (Open For Orders), "CLZ" (Closed), "PND" (Pending Approval), "REJ" (Rejected). <u>Required:</u> false</p>
	<p><u>Name:</u> lastModifiedDateTime <u>Description:</u> Limits results to GT&amp;Cs updated since the passed date/time. <u>In:</u> query <u>Type:</u> dateTime; Format: YYYY-MM-DDThh:mm:ss.SSS+ -00:00 All time should be specified in local time zone with time zone offset from UTC in hours and minutes ahead (+) or behind (-) UTC. <u>Required:</u> false</p>

Component	Detail / Description
	<p><u>Name:</u> SystemID  <u>Description:</u> Identifies the system that is exchanging data with G-Invoicing.  <u>In:</u> header  <u>Type:</u> string [100]            Required: true</p>
	<p><u>Name:</u> Agency-Tracking-Identifier  <u>Description:</u> Unique identifier from agency system, optionally supplied in the request.  <u>In:</u> header  <u>Type:</u> string [50]            Required: false</p>
<b>Consumes</b>	N/A
<b>Produces</b>	<p><u>Status Code:</u> 200  <u>Description:</u> Successful call returns Call Detail and a list of GT&amp;Cs.  <u>Content Type:</u> application/xml  <u>Schema(s):</u> <a href="#">Call Detail</a>, <a href="#">Document List</a></p>

### 3.2.3.2 Resource: Single GT&C by ID

Component	Detail / Description
<b>Path</b>	/ginv/services/v1_0/gtc/<id> (to pull single GT&C for v2.1 XML schema) or ginv/services/v2_0/gtc/<id> (to pull single GT&C for v3.0 XML schema)
<b>Method</b>	GET
<b>Description</b>	Returns an individual GT&C referenced by the passed unique RequestType / RequestTypeID combination.
<b>Example</b>	GET /ginv/services/v1_0/gtc/A1610-017-021-012345 GET /ginv/services/v2_0/gtc/A2006-017-021-123456 Host: <a href="http://ws.igt.fiscal.treasury.gov">ws.igt.fiscal.treasury.gov</a> Accept: application/xml Accept Encoding: gzip, deflate Connection: Keep-Alive
<b>Parameters</b>	<p><u>Name:</u> id  <u>Description:</u> A Unique ID referencing an individual GT&amp;C.  <u>In:</u> path (required)  <u>Type:</u> string [20]  <u>Required:</u> true</p>
	<p><u>Name:</u> SystemID  <u>Description:</u> Identifies the system that is exchanging data with G-Invoicing.  <u>In:</u> header  <u>Type:</u> string [100]            Required: true</p>

Component	Detail / Description
	<p><u>Name:</u> Agency-Tracking-Identifier  <u>Description:</u> Unique identifier from agency system, optionally supplied in the request.  <u>In:</u> header  <u>Type:</u> string [50]  <u>Required:</u> false</p>
<b>Consumes</b>	N/A
<b>Produces</b>	<p><u>Status Code:</u> 200  <u>Description:</u> Successful call returns Call Detail and an individual GT&amp;C.  <u>Content Type:</u> application/xml  <u>Schema(s):</u> <a href="#">Call Detail</a>, <a href="#">GT&amp;C</a></p>

### 3.2.3.3 Resource: Single Attachment by ID

Component	Detail / Description
<b>Path</b>	<p>/ginv/services/v1_0/attachment/&lt;id&gt; (for GT&amp;C attachment)  /ginv/services/v1_0/order/attachment/&lt;id&gt; (for Order attachment)  /ginv/services/v1_0/order/performance/attachment/&lt;id&gt; (for Performance attachment)</p>
<b>Method</b>	GET
<b>Description</b>	Returns an individual Attachment referenced by the passed unique ID.
<b>Example</b>	<p>GET /ginv/services/v1_0/attachment/987654321  GET /ginv/services/v1_0/order/attachment/987654321  GET /ginv/services/v1_0/order/performance/attachment/987654321  Host: <a href="http://ws.igt.fiscal.treasury.gov">ws.igt.fiscal.treasury.gov</a>  Accept: application/xml  Accept Encoding: gzip, deflate  Connection: Keep-Alive</p>
<b>Parameters</b>	<p><u>Name:</u> id  <u>Description:</u> A Unique ID referencing an individual Attachment.  <u>In:</u> path  <u>Type:</u> string [30]  <u>Required:</u> true</p>
	<p><u>Name:</u> SystemID  <u>Description:</u> Identifies the system that is exchanging data with G-Invoicing.  <u>In:</u> header  <u>Type:</u> string [100]  <u>Required:</u> true</p>
	<p><u>Name:</u> Agency-Tracking-Identifier  <u>Description:</u> Unique identifier from agency system, optionally supplied in the request.  <u>In:</u> header  <u>Type:</u> string [50]  <u>Required:</u> false</p>
<b>Consumes</b>	N/A

Component	Detail / Description
<b>Produces</b>	<p><u>Status Code:</u> 200  <u>Description:</u> Successful call returns the binary content of the Attachment file.  <u>Content Type:</u> application/octet-stream  <u>Schema(s):</u> file</p>

### 3.2.3.4 Resource: Orders List

Component	Detail / Description
<b>Path</b>	<p>Ginv/services/v1_0/order (to pull list of Orders for v2.2 of the XML schema)  or Ginv/services/v2_0/order&gt; (to pull list of Orders for v2.3 of the XML schema)</p> <p><i>Note: The v2.3 Order_Document_Summary.xsd uses the same format as the v3.0 Document_Summary.xsd for GT&amp;Cs, which supports 1-to-many ALCs per partner. ALCs for an Order will only occupy the first occurrence of AgencyLocationCode.</i></p>
<b>Method</b>	GET
<b>Description</b>	Returns a list of all Orders from the System that the User is authorized to access. The keys necessary to obtain detailed Order data are obtained by pulling the Orders List.
<b>Example</b>	<p>GET /ginv/services/v1_0/order?lastModifiedDate=2017-05-09T17:30:00.000-04:00  GET /ginv/services/v2_0/order?lastModifiedDate=2021-03-08T19:20:00.000-04:00  Host: <a href="https://ws.igt.fiscal.treasury.gov">ws.igt.fiscal.treasury.gov</a>  Accept: application/xml  Accept Encoding: gzip, deflate  Connection: Keep-Alive</p>
<b>Parameters</b>	<p><u>Name:</u> agencyLocationCode  <u>Description:</u> Limits results to Orders associated with one of the passed ALCs.  <u>In:</u> query  <u>Type:</u> Comma separated array of strings  <u>Required:</u> false</p>
	<p><u>Name:</u> status  <u>Description:</u> Limits results of Orders associated with one of the passed status types.  <u>In:</u> query  <u>Type:</u> Comma separated array of strings, enumeration  v1_0 Values: "PRA" (Pending Requesting Approval) or "P1A" (Pending Partner 1 Approval), "SSA" (Share with Servicing) or "SP2" (Shared with Partner 2), "PSA" (Pending Servicing Approval) or "P2A" (Pending Partner 2 Approval), "REC" (Open), "DR" (Draft - when Order Mod&gt;0), "REJ" (Rejected), "CLZ" (Closed)  v2_0 Values: "P1A" (Pending Partner 1 Approval), "SP2" (Shared with Partner 2), "P2A" (Pending Partner 2 Approval), "REC" (Open), "DR" (Draft - when Order Mod&gt;0), "REJ" (Rejected), "CLZ" (Closed)  <u>Required:</u> false</p>
	<p><u>Name:</u> lastModifiedDate  <u>Description:</u> Limits results to Orders updated since the passed date/time.  <u>In:</u> query  <u>Type:</u> dateTime; Format: YYYY-MM-DDThh:mm:ss.SSS+ -00:00  All time should be specified in local time zone with time zone offset from UTC in hours and minutes ahead (+) or behind (-) UTC.  <u>Required:</u> false</p>



Component	Detail / Description
	<p><u>Name:</u> SystemID  <u>Description:</u> Identifies the system that is exchanging data with G-Invoicing.  <u>In:</u> header  <u>Type:</u> string [100]            Required: true</p>
	<p><u>Name:</u> Agency-Tracking-Identifier  <u>Description:</u> Unique identifier from agency system, optionally supplied in the request.  <u>In:</u> header  <u>Type:</u> string [50]            Required: false</p>
<b>Consumes</b>	N/A
<b>Produces</b>	<p><u>Status Code:</u> 200  <u>Description:</u> Successful call returns Call Detail and a list of Orders.  <u>Content Type:</u> application/xml  <u>Schema(s):</u> <a href="#">Call Detail</a>, <a href="#">Document List</a></p>

### 3.2.3.5 Resource: Single Order by ID

Component	Detail / Description
<b>Path</b>	Ginv/services/v1_0/order/<id> (to pull Orders for v2.2 of the XML schema) or Ginv/services/v2_0/order/<id> (to pull Orders for v2.3 of the XML schema)
<b>Method</b>	GET
<b>Description</b>	Returns an individual Order referenced by the passed unique identifier for an individual Order. Identifiers to Attachments related to an Order (i.e., Attachment IDs) are obtained by pulling the Single Order by ID.
<b>Example</b>	GET /ginv/services/v1_0/order/O1705-123-234-000146 or GET /ginv/services/v2_0/order/O2005-123-234-000146 Host: <a href="http://ws.igt.fiscal.treasury.gov">ws.igt.fiscal.treasury.gov</a> Accept: application/xml Accept Encoding: gzip, deflate Connection: Keep-Alive
<b>Parameters</b>	<p><u>Name:</u> id  <u>Description:</u> A Unique ID referencing an individual Order.  <u>In:</u> path (required)  <u>Type:</u> string [20]  <u>Required:</u> true</p>
	<p><u>Name:</u> SystemID  <u>Description:</u> Identifies the system that is exchanging data with G-Invoicing.  <u>In:</u> header  <u>Type:</u> string [100]            Required: true</p>

Component	Detail / Description
	<p><u>Name:</u> Agency-Tracking-Identifier  <u>Description:</u> Unique identifier from agency system, optionally supplied in the request.  <u>In:</u> header  <u>Type:</u> string [50]  <u>Required:</u> false</p>
<b>Consumes</b>	N/A
<b>Produces</b>	<p><u>Status Code:</u> 200  <u>Description:</u> Successful call returns Call Detail and an individual Order.  <u>Content Type:</u> application/xml  <u>Schema(s):</u> <a href="#">Call Detail</a>, <a href="#">Order</a></p>

### 3.2.3.6 Resource: Performance List

Component	Detail / Description
<b>Path</b>	/ginv/services/v1_0/order/performance
<b>Method</b>	GET
<b>Description</b>	Returns a list of all Performance transactions from the System that the User is authorized to access, based on Order permissions.
<b>Example</b>	<p>GET /ginv/services/v1_0/order/performance?lastModifiedDate=2017-05-09T17:30:00.000-04:00?agencyLocationCode=12010001  Host: <a href="http://ws.igt.fiscal.treasury.gov">ws.igt.fiscal.treasury.gov</a>  Accept: application/xml  Accept Encoding: gzip, deflate  Connection: Keep-Alive</p>
<b>Parameters</b>	<p><u>Name:</u> agencyLocationCode  <u>Description:</u> Limits results to Performance transactions related to Orders containing one of the passed ALCs.  <u>In:</u> query  <u>Type:</u> Comma separated array of strings  <u>Required:</u> false</p>
	<p><u>Name:</u> lastModifiedDate  <u>Description:</u> Limits results to Performance transactions created since the passed date/time.  <u>In:</u> query  <u>Type:</u> dateTime (ISO 8601)  <u>Required:</u> false</p>
	<p><u>Name:</u> SystemID  <u>Description:</u> Identifies the system that is exchanging data with G-Invoicing.  <u>In:</u> header  <u>Type:</u> string [100]  <u>Required:</u> true</p>

Component	Detail / Description
	<p><u>Name:</u> status  <u>Description:</u> Limits results of Performance associated with one of the passed Status values.  <u>In:</u> query  <u>Type:</u> Comma separated array of strings, enumeration  <u>Values:</u> All values in Performance FIDS are supported  <u>Required:</u> false</p>
	<p><u>Name:</u> orderNumber  <u>Description:</u> Limits results to Performance associated with a single Order  <u>In:</u> query  <u>Type:</u> string [20]  <u>Required:</u> false</p>
	<p><u>Name:</u> Agency-Tracking-Identifier  <u>Description:</u> Unique identifier from agency system, optionally supplied in the request.  <u>In:</u> header  <u>Type:</u> string [50]  <u>Required:</u> false</p>
<b>Consumes</b>	N/A
<b>Produces</b>	<p><u>Status Code:</u> 200  <u>Description:</u> Successful call returns Call Detail and a list of Performance transactions.  <u>Content Type:</u> application/xml  <u>Schema(s):</u> <a href="#">Call Detail</a>, <a href="#">Document List</a></p>

*Note: Settlement Status and lastModifiedDateTime are initially set by G-Invoicing when Performance is reported. The values of both will change if/as settlement occurs.*

### 3.2.3.7 Resource: Single Performance by ID

Component	Detail / Description
<b>Path</b>	Ginv/services/v1_0/order/performance/{id}
<b>Method</b>	GET
<b>Description</b>	Returns an individual Performance transaction referenced by the passed unique identifier for an individual Performance transaction.
<b>Example</b>	<p>GET /ginv/services/v1_0/order/performance/P1805-123-234-000456  Host: <a href="http://ws.igt.fiscal.treasury.gov">ws.igt.fiscal.treasury.gov</a>  Accept: application/xml  Accept Encoding: gzip, deflate  Connection: Keep-Alive</p>
<b>Parameters</b>	<p><u>Name:</u> id  <u>Description:</u> A Unique ID referencing an individual Performance transaction.  <u>In:</u> path (required)  <u>Type:</u> string [20]  <u>Required:</u> true</p>

Component	Detail / Description
	<p><u>Name:</u> SystemID  <u>Description:</u> Identifies the system that is exchanging data with G-Invoicing.  <u>In:</u> header  <u>Type:</u> string [100]            Required: true</p>
	<p><u>Name:</u> Agency-Tracking-Identifier  <u>Description:</u> Unique identifier from agency system, optionally supplied in the request.  <u>In:</u> header  <u>Type:</u> string [50]            Required: false</p>
<b>Consumes</b>	N/A
<b>Produces</b>	<p><u>Status Code:</u> 200  <u>Description:</u> Successful call returns an individual Performance transaction.  <u>Content Type:</u> application/xml  <u>Schema:</u> Performance</p>

### 3.2.4 Common Headers

#### 3.2.4.1 Accept Header

Component	Detail / Description
<b>Name</b>	Accept
<b>Value</b>	application/xml
<b>Description</b>	Indicates the service client expects content in XML format. No other format is currently supported.

#### 3.2.4.2 Accept-Encoding

Component	Detail / Description
<b>Name</b>	Accept-Encoding
<b>Value</b>	gzip, deflate
<b>Description</b>	Allows the service client to indicate it supports compressing the response payload using gzip compression.

#### 3.2.4.3 Connection Header

Component	Detail / Description
<b>Name</b>	Connection
<b>Value</b>	keep-alive
<b>Description</b>	Indicates the service client wants to use HTTP keep-alive to more efficiently make multiple requests.

### 3.3 Supported Environments

The G-Invoicing application operates within the Treasury Web Application Infrastructure (TWAI) environments. Interface testing will take place in G-Invoicing’s Functional Test and Quality Assurance environments. G-Invoicing operates both Production and Contingency environments.

Fail-over by G-Invoicing from Production to Contingency environments will be transparent.

**Table 1: Supported Environments**

G-Invoicing TWAI	Use
Functional Test (FT)	Future view of Production (new release) – will be used on a limited basis for interface testing.
Quality Assurance - Current (QAC)	Current view of Production environment – used for agency testing.
Quality Assurance - Future (QAF)	Future view of Production (new release) – used for UAT.
Production	Production

## 4 Interface Specification

### 4.1 Processing Logic

- 4.1.1 Agencies with interfacing systems will make a web service call to G-Invoicing to request new or modified GT&C, Order or Performance information. The credentials for the agency systems are verified by the TWAI. Certificate-based authentication is performed against TWAI policies. Web service requests for G-Invoicing data require a United States Department of the Treasury issued certificate.
- 4.1.2 Validate the parameters that are passed in the request depending on the data being requested (e.g., Document List, Single Document, Single Attachment) as stated in **Section 3.2** of this document. The parameters to be passed are either required, optional, and/or conditional depending on the request.
- 4.1.3 G-Invoicing will retrieve the requested data.
- 4.1.4 The data is formatted into an XML document per the XML schema(s) referenced in **Appendix A** of this document.
- 4.1.5 G-Invoicing transmits the data to the agency system.
- 4.1.6 If errors are encountered at any time while processing the request, G-Invoicing will capture that data and respond back to the agency partner with the error details.

## 4.2 Business Rules

- 4.2.1 System requests for GT&C, Order and Attachment data will be fulfilled with data as it exists when the request is answered.

*Note: This statement covers any previous or historical states that a document would have been in prior to its current state. G-Invoicing will not provide a document history (i.e., multiple versions of the same document) or deleted attachments.*

- 4.2.2 The agency system must be granted permissions (aka, user role) to view the type of data being requested.

- 4.2.3 The agency system must be assigned to Organizational Group(s) containing the ALC(s) for which the data is being requested.

4.2.3.1 An agency system only requires access to one side of an agreement (Requesting or Servicing) not both to view all data associated with the agreement, including attachments. The agency system will be properly authorized to ensure it is valid for the type of request being submitted.

4.2.3.2 Users granted data access to an Order will be allowed to access Performance related to that Order (assuming they are assigned a role to view Performance).

- 4.2.4 GT&C and Order document requests submitted with a Status parameter of “Delete” will not be fulfilled.

*Note: There are no restrictions on pulling deleted Performance records.*

- 4.2.5 GT&C document requests submitted with a Status parameter of “Draft” (DR) will not be fulfilled.

- 4.2.6 Order document requests submitted with a Status parameter of “Draft” (DR) will only return Orders with Modification Number > 0.

- 4.2.7 GT&C and Order requests for Document Types submitted without a Status parameter will return documents in all statuses, except where noted above.

- 4.2.8 Character entity references ampersand (&) and less than (<) are escaped on output to XML. The escape sequence for ampersand is &amp; and the escape sequence for less than is &lt;.

## 4.3 File Naming Convention

N/A

## 4.4 Interface Timing

The web service is available 24 hours per day, 7 days per week. G-Invoicing has a daily scheduled outage for maintenance as noted below.

3:45 AM - 4:15 AM EST (Monday through Saturday)

11:00 AM - 11:30 AM EST (Sunday)

Agency systems are in full control of the frequency and the timing of this interface.

## 4.5 Retransmissions

Retransmissions are not needed because the G-Invoicing web services provide for synchronous operation in that the agencies with interfacing systems will be waiting for the response from G-Invoicing before continuing.

Should the web service connection somehow fail in the middle of a series of client requests to G-Invoicing (e.g., multiple document requests, multiple attachment requests) the client (i.e., interfacing agency system) is responsible for continuing the requests when services are restored.

## 4.6 Interface Data Details

The information below documents the data sent for the methods available on the web service. For more details, refer to the XML schemas for the service in Appendix A.

### 4.6.1 Business – Data Elements

The business data for GT&C and Orders may be accessed on the [Bureau of the Fiscal Service G-Invoicing](#) website.

The data elements in Table 2 will be returned with each single GT&C, Order or Performance request where the requested document contains one or more attachments. This data describes each attachment and provides the means (i.e., URL) for a subsequent request to retrieve the attachment(s).

**Table 2: Attachment Summary Data Elements**

Familiar Name	XML Tag	Definition	Constraints	Optionality
Attachment File Name	<FileName>	The actual name of the attachment file.	String [1, 32] Maximum length = 132 String UTF-8	Required
Attachment File Alias	<FileNameAlias>	Descriptive name for an attachment. Different from the name assigned to the file itself.	String [0,132] Maximum length = 132 String UTF-8	Optional
Attachment ID	<AttachmentID>	Unique identifier for an attachment.	Integer Maximum length = 30	Required
Attachment Updated By	<FullName>	The username or partner (Buyer or Seller) that uploaded the attachment.	String [0,100] Maximum length = 100 String UTF-8	Required
Attachment Date Time	<UploadDateTime>	The date and time the file was uploaded into G-Invoicing.	Date Time Format: YYYY-MM-DDThh:mm:ss.SSS+ - 00:00 All time should be specified in local time zone with time zone offset from UTC in hours and minutes ahead (+) or behind (-) UTC.	Required
File Size	<FileSize>	The size of the attachment expressed in kilobytes (kB). <b>Note:</b> <i>Small files may be expressed as 0 kB.</i>	Integer Minimum length = 1 Maximum length = 8	Required

Familiar Name	XML Tag	Definition	Constraints	Optionality
Document URL	<URL>	The URL that will be used in a subsequent request by the agency system to retrieve the attachment.	String [0, 4000] Maximum length = 4000 String UTF-8	Required

#### 4.6.2 Response – Data elements

The data elements below in Table 3 will be returned in the body of every response generated by G-Invoicing. The data elements contained in Table 4 will be returned when requesting a list of new or modified documents from G-Invoicing.

**Table 3: Call Detail Response Data Elements**

Familiar Name	XML Tag	Definition	Constraints	Optionality
Agency Partner ID	<PartnerID>	Identifies the intended recipient of the transmission.	String [100] Minimum length = 0 Maximum length = 100 String UTF-8	Required
Agency System ID	<SystemID>	Identifies the system that is exchanging data with G-Invoicing.	String [100] Minimum length = 1 Maximum length = 100 String UTF-8	Required
Agency Tracking Identifier	<RequestID>	Unique identifier, optionally supplied in the request and echoed back in the response.	String [50] Minimum length = 0 Maximum length = 50 String UTF-8	Optional
G-Invoicing Tracking Identifier	<GINVTrackingID>	Unique tracking identifier, generated by G-Invoicing.	String [50] Minimum length = 1 Maximum length = 50 String UTF-8	Required
Environment	<Environment>	Describes the environment in which the system interface resides.	String [30] Minimum length = 0 Maximum length = 30 String UTF-8 Values: "Production", "Quality Assurance", "Functional Test".	Required
Request Type	<RequestType>	Type of request that was submitted to G-Invoicing by the agency system.	String [30] Minimum length = 0 Maximum length = 30 String UTF-8 Values: "GTC List", "Order List", "Performance List", "Single GTC", "Single Order", "Single Performance", "Single Attachment". <i>Note: Values are derived from the service being accessed.</i>	Required
Record Count	<RecordCount>	The total number of records in the payload.	Integer Minimum length = 1 Maximum length = 8	Required



**Table 4: Document List Data Elements**

Familiar Name	XML Tag	Definition	Constraints	Optionality
Requesting Agency Location Code(s)	GT&C/Orders: <RequestingAgencyLocations/AgencyLocationCode>  Performance: <RequestingAgencyLocationCode>	Unique identifier(s) for a federal agency buying goods and/or services.  GT&Cs: 1-to-many ALCs per side.  Orders: Only one ALC for per side, each appearing in array.	String [0-9]{8} (i.e., Digits 0 to 9. Length must be eight digits.) String UTF-8. Min=1. no Max	Required
Servicing Agency Location Code(s)	GT&C/Orders: <ServicingAgencyLocations/AgencyLocationCode>  Performance: <ServicingAgencyLocationCode>	Performance: ALCs are not (yet) returned in arrays.	String [0-9]{8} (i.e., Digits 0 to 9. Length must be eight digits.) String UTF-8. Min=1. no Max	Required
Document Type	<DocumentType>	Describes the document type (e.g., GT&C, Order, Performance) that was requested.	String [30] Minimum length = 0 Maximum length = 30 String UTF-8 Values: "GTC", "Order", "Performance"	Required
Manual Entry Indicator	<ManualEntryIndicator>	Indicates whether the document was introduced by a user or a system.	String Enumeration: "Y" (Yes), "N" (No) "N" indicates System generated "Y" indicates User generated	Required
Document ID	<DocumentNumber>	Unique identifier for a document.	String [20] Minimum length = 0 Maximum length = 20 String UTF-8 [A-Z, 0-9, -] (i.e., upper case alpha characters, digits 0-9, and dashes.)	Required
Modification Number	<ModificationNumber>	Unique identifier assigned to a GT&C or Order document that has been modified from the original.	Integer Maximum length = 10	Conditional
Status	<Status>	The current status of the GT&C or Order document.	See Federal Intragovernmental Data Standards (FIDS).	Conditional
Last Modified Date/Time	<LastModifiedDateTime>	The date/time the document was last updated.	DateTime Format: YYYY-MM-DDThh:mm:ss.SSS+ -00:00 All time should be specified in local time zone with time zone offset from UTC in hours and minutes ahead (+) or behind (-) UTC.	Required
Document URL	<URL>	The URL that will be used in a subsequent request by the agency system to retrieve the document.	String [4000] Minimum length = 0 Maximum length = 4000 String UTF-8	Required

## 5 Error Specifications

Standard web service faults are generated for exceptions that can cause the request to not be processed. If the agency system cannot be authenticated or authorized, then a fault is returned. If the requested resource is unavailable then a fault will be thrown. All services may return the following HTTP status codes along with variable error message text describing the error(s) in the response.

Error ID	HTTP Status Code	Example
1	400 – Bad Request ValidationFailedException <i>Note: Message text included in the &lt;ErrorDesc&gt; element will vary depending on the error condition.</i>	<pre>&lt;ns0:ErrorDetail&gt;   &lt;ns0:ErrorDesc&gt;ValidationFailedException message = Requesting agency Point Of Contact Full Name is required.&lt;/ns0:ErrorDesc&gt;   &lt;ns0:ErrorTitle&gt;400 ValidationFailedException&lt;/ns0:ErrorTitle&gt;   &lt;ns0:RequestDateTime&gt;2018-05-24T15:43:27.578-04:00&lt;/ns0:RequestDateTime&gt;   &lt;ns0:RequestTypeIdentifier&gt;Order Create&lt;/ns0:RequestTypeIdentifier&gt;   &lt;ns0:Status&gt;400&lt;/ns0:Status&gt; &lt;/ns0:ErrorDetail&gt;</pre>
2	403 – Unauthorized AccessDeniedException <i>Note: Message text included in the &lt;ErrorDesc&gt; element will vary depending on the error condition.</i>	<pre>&lt;ns0:ErrorDetail&gt;   &lt;ns0:ErrorDesc&gt;AccessDeniedException message = User is not authorized to the system.&lt;/ns0:ErrorDesc&gt;   &lt;ns0:ErrorTitle&gt;403 AccessDeniedException&lt;/ns0:ErrorTitle&gt;   &lt;ns0:RequestDateTime&gt;2018-05-23T08:33:04.426-04:00&lt;/ns0:RequestDateTime&gt;   &lt;ns0:RequestTypeIdentifier&gt;Order Create&lt;/ns0:RequestTypeIdentifier&gt;   &lt;ns0:Status&gt;403&lt;/ns0:Status&gt; &lt;/ns0:ErrorDetail&gt; &lt;/Ginv_Error&gt;</pre>
3	500 – Internal Server Error ServerException <i>Note: Message text included in the &lt;ErrorDesc&gt; element will vary depending on the error condition.</i>	<pre>&lt;ns0:ErrorDetail&gt;   &lt;ns0:ErrorDesc&gt;ServerException message = Multiple users found.&lt;/ns0:ErrorDesc&gt;   &lt;ns0:ErrorTitle&gt;500 ServerException&lt;/ns0:ErrorTitle&gt;   &lt;ns0:RequestDateTime&gt;2018-05-23T08:29:07.566-04:00&lt;/ns0:RequestDateTime&gt;   &lt;ns0:RequestTypeIdentifier&gt;Order Create&lt;/ns0:RequestTypeIdentifier&gt;   &lt;ns0:Status&gt;500&lt;/ns0:Status&gt; &lt;/ns0:ErrorDetail&gt;</pre>

## 6 Security

The TWAI will accept web service traffic, perform certificate-based authentication against security policies, and route the requests to G-Invoicing. Separate certificates are needed for test and production environments.

No Personal Identifying Information (PII) is being transported by this system interface. There is no risk that this interface or the included functions will allow additional access to G-Invoicing data.

The Department of Defense has rated information contained in G-Invoicing as Mission Assurance Category III. The MAC III rating is for systems handling information that is necessary to conduct day-to-day business, but does not materially affect support to deployed or contingency forces in the short-term. The consequences of loss of integrity or availability can be tolerated or overcome without significant impacts on mission effectiveness or operational readiness. The consequences could include the delay or degradation of services or commodities enabling routine activities. Mission Assurance Category III systems require protective measures, techniques or procedures generally commensurate with commercial best practices.

## **7 Interface Integrity**

### **7.1 TWAI**

TWAI security infrastructure, policies and procedures guarantee that only authenticated and authorized entities are permitted access to the G-Invoicing application and its assets. Virus detection, intrusion detection, and network and infrastructure monitoring software and hardware are provided by and operated in the TWAI.

### **7.2 Communication Channel**

Adhere to the Guidelines for protecting sensitive data during electronic dissemination across networks as stated in the NIST Special Publication (SP) 800-52 (rev 1), Selection, Configuration, and Use of Transport Layer Security (TLS) Implementations.

Meet security requirements for NIST Special Publication (SP) 800-53 (rev 4), Recommended Security Controls for Federal Information Systems, and other applicable guidance, such as Treasury Directive Publication (TDP) 85-01.

## 8 Revision History

Vers. Num.	Date of Change	G-Inv Rel.	Change/Revision Description	Page/Section Affected
0.1	09/22/16	2.1	Initial Draft	All
0.2	01/05/17	2.1	Updates after meeting with GEX group	All
0.3	02/02/17	2.1	3.2 Protocol information added, updates to all sections.	All
0.4	02/06/17	2.1	Updates after peer review.	All
0.5	02/23/17	2.1	Added XML schema documentation.	4.6, 5, Appendix A
0.6	02/28/17	2.1	Added sample XML.	Appendix A
0.7	03/03/17	2.1	Updates after internal review.	All
0.8	03/07/17	2.1	Updates after peer review.	All
0.9	03/10/17	2.1	Updates after final internal review.	All
0.10	03/29/17	2.1	Updates after Fiscal Service review.	4.1.1, 5, 4.6.1, A
1.0	03/29/17	2.1	Baseline	All
1.1	04/24/17	2.1	Data element edits from D.O.D. BIO.	4.6.1 Appendix A
1.2	04/26/17	2.1	Omit "Draft" and "Delete" statuses.	3.2.3.1 4.2 4.6.1
1.3	05/19/17	2.1	Drop enumeration from Status element, added Environment element values. Updated data elements that were "Optional" with min required char of 1 to 0. Error Detail in Error schema is 1:Many	4.6.1  4.6.1  Appendix A
1.4	05/26/17	2.1	Updated schema versions to 2.0 Data element edits. Added 400 HTTP error code. Schema updates	1.3.3 4.6.1 5 Appendix A
1.5	06/05/17	2.1	Changed PartnerID and SystemID elements from Integer to String. Error schema changed to Ginv_Error.	4.6.1  Appendix A
1.6	06/19/17	2.1	Removed Attachment List Summary	1.3.3, 3.2.3, 4.1.2, 4.6.1, Appendix A
1.7	06/20/17	2.2	Added Order to specification.	All
2.0	07/06/17	2.2	Prepped for Fiscal Service approval.	All
2.0.1	07/13/17	2.2	Raised SystemID, PartnerID to 100 chars. Added 2 <sup>nd</sup> approval for GT&C	3.2.3, 4.6.1 Appendix A
2.0.2	08/08/17	2.2	Removed GT&C and Order data tables.	4.6.1, 4.6.2
2.0.3	09/07/17	2.2	Added HTTP Error Code Table	5
2.0.4	10/25/17	2.2	Added min and max length to Record Count data element. Added Attachment Summary table.	Table 3  4.6.1
2.0.5	11/08/17	2.2	GINV-1295, GINV-1326 Updated schema reference info. Enumerated StatusCode values, Made approval fields optional, corrected document inconsistencies.	Appendix A 1.3.2 Appendix A Table 2, Table 3

2.0.6	12/12/17	2.2	Updated schema and XML information.	Appendix A
2.0.7	01/19/18	2.2	Updates based on data standards.	All
2.0.8	02/01/18	2.2	Updated schema and XML information	Appendix A
2.0.9	02/28/18	2.2	Removed /gtc from Attachment URL	3.2.3.3
2.0.10	03/14/18	2.2	Removed Attachment from examples provided for Document Type. Added business rule for status "PRA"	Table 4 4.2.6
2.0.11	04/11/18	2.2	1) Added character entity reference codes business rule. (2) Updated date/time format. (3) Updated FileSize to reflect kB.	(1) 4.2.7 (2) All (3) Table 2
2.0.12	04/30/18	2.2	Add 'Single Attachment' to Request Types	Table 3
2.0.13	05/21/18	2.2	GINV-1787 move Org Ref data to Header level in XSD	Appendix A
2.0.14	5/30/18	2.2	Updated HTTP error status codes	5
2.0.15	6/6/18	2.2	Updated Resource information	3.2.3
3.0	6/8/18	2.2	Baseline	All
3.0.1	6/27/18	2.2	Updated Header	Appendix A
3.1	7/31/18	2.3	Added Performance transaction	All
3.2	8/6/18	2.3	Updated following internal review	All
3.3	8/28/18	2.3	Following Treasury review: (1) updated Partner/System note, (2) removed GTC and Order XML samples	3.2.3 Appendix A
4.0	9/4/18	2.3	Approved – see GINV-1933	N/A
4.0.1	10/12/18	2.3	Deleted attachments are excluded. Order access = Performance access.	4.2.1-3
4.0.2	10/24/18	2.3	Perf IDs obtained via Single Order by ID resource ... <i>(No longer true)</i>	3.2.3, 4.2.3.2 Table 4
4.1	12/20/18	2.3	Numerous changes in reaction to Dec 4-6 Perf mtgs. Added Performance List.	All
4.2	12/24/18	2.3	Updates after internal review	4.2.1, Table 4
4.3	1/9/19	2.3	Better aligned schemas to FIDS. Updated Treasury system owner name. Extend Order services for Performance.	1.3.3, 3.2.3.3, 3.2.3.6-7
4.4	2/13/19	2.3	Allow agencies to pull Orders in draft status if Mod > 0 so they know Orders are not open.	4.2.4 – 4.2.9
5.0	2/25/19	2.3	Baseline for Performance Txn	All
5.0.1	3/19/19	n/a	Removed extra requirement to disallow pull of GT&Cs in pending status. This matches code.	4.2.7
5.0.2	3/22/19	n/a	Corrected spec to match code ... Manual Entry Indicator 'Y' indicates manual entry.	Table 4
5.1	4/15/19	2.3 +1 (TBD)	Added settlement parameters to Pull Performance List	3.2.3.6
5.2	4/16/19	2.3 +1 (TBD)	Removed comments after internal review. Added explanation of how Settlement is audited. Distributed for Settlement approval.	3.2.3.6
6.0	4/29/19	2.3 +1 (TBD)	Baselined for Settlement	History
6.1	6/12/19	2.3 +1 (TBD)	Changed 'settlementStatus' to 'status' for Performance List. Added note to 4.2.4	3.2.3.6 4.2.4

6.1.1	8/29/19	N/A	Clarified policy requiring at least one System ID per Partner ID.	3.2.3
v6.1.2	3/20/20	N/A	XML namespaces may vary w/ schema version	2.2.3a
v6.2	6/12/20	r4.0	Single GT&C resource supports v 1_0 and 2_0	3.2.3.2
v6.2.1	6/17/20	r4.0	GT&C List resource supports v 1_0 and 2_0	3.2.3.1, Table 4
v6.3	6/23/20	r4.0	1. As of r2.2, G-Invoicing does not send empty tags. 2. SystemID is now required.	Appendix A Every resource
v6.4	12/03/20	r4.0	Removed DAG reference as System Ids are now assigned to Org Groups P1A or PRA Orders will be returned in the Order list when Mod>=0	4.2.3
v7.0	5/21/20	r4.1	New version to support Seller Facilitated Orders. Three statuses have changed.	3.2.3.4, 4.2.7
v7.0.1	5/29/20	r4.1	Order List resource must support v 2_0	3.2.3.4
v7.1	12/03/20	r4.1	Clarified Order List status parameters for v 1_0 & v 2_0	3.2.3.4
v7.1.1	1/12/2021	r4.0	Clarification on change introduced in r4.0: Document Summary List now includes ALCs in arrays for GT&Cs and Orders, but not (yet) for Performance.	Table 4
v7.1.2	2/23/2021	r4.0	Removed reference to TWAI architecture diagram, which is not publicly available	7.1


## Appendix A: Messaging Protocol & Data Encapsulation

### 1 G-Invoicing Message Encapsulation

Transmissions into and out of G-Invoicing will utilize RESTful web-services over the internet with an XML payload. The HTTP Request and Response will have the structure depicted in diagrams in 1.1 and 1.2 below.


#### 1.1 HTTP Request

The HTTP Request will have an empty Body when the Header contains a “GET” command. When the Request contains a “PUT” command the Body will contain an XML payload.

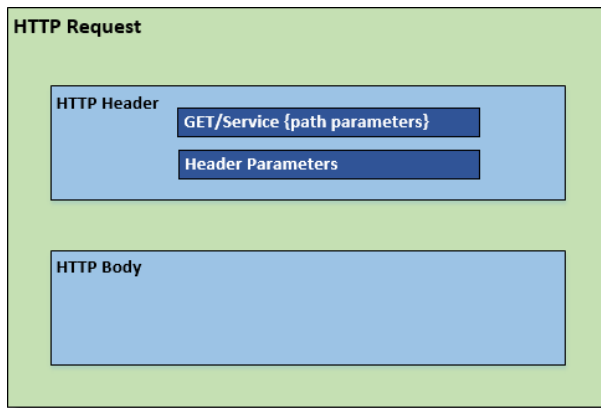


#### 1.2 HTTP Response

Call Detail data will be returned in every response generated by G-Invoicing with the exception of the individual attachment download. Call Detail contains metadata about the Request/Response. The Call Detail data will be part of the HTTP Body and precede any data included in the response that satisfies the initial request.

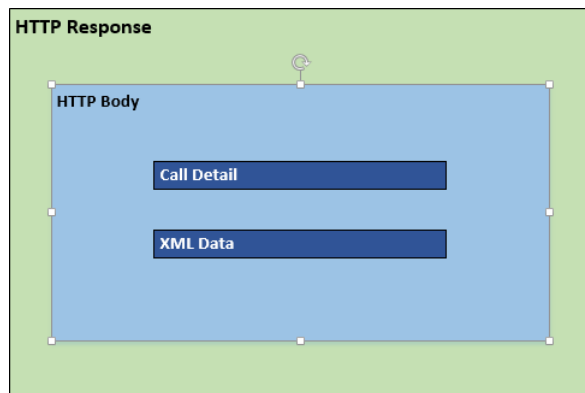


## 2 Call Detail

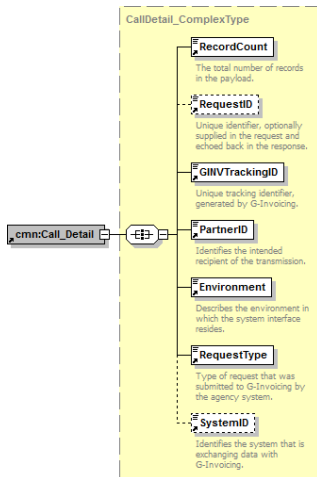

### Call Detail Sample XML

```
<?xml version="1.0" encoding="UTF-8"?>
<!--Sample XML file generated by XMLSpy v2017 sp2 (x64) (http://www.altova.com)-->
<cmn:Call_Detail xmlns:cmn="urn:us:gov:treasury"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:schemaLocation="urn:us:gov:treasury:ginv:gtc GTC.xsd">
  <cmn:RecordCount>50</cmn:RecordCount>
  <cmn:RequestID>277655239</cmn:RequestID>
  <cmn:GINVTrackingID>3357822214</cmn:GINVTrackingID>
  <cmn:PartnerID>1789</cmn:PartnerID>
  <cmn:Environment>Production</cmn:Environment>
  <cmn:RequestType>Single GTC</cmn:RequestType>
  <cmn:SystemID>789</cmn:SystemID>
</cmn:Call_Detail>
```

## 3 Document List

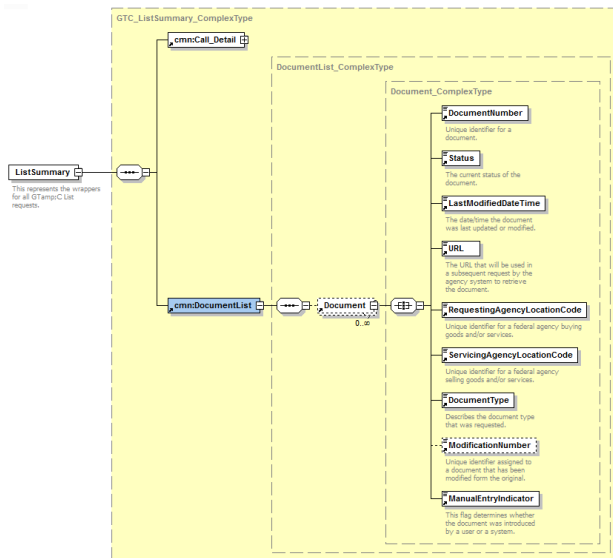


### Document List Sample XML

```
<?xml version="1.0" encoding="UTF-8"?>
<!--Sample XML file generated by XMLSpy v2017 sp2 (x64) (http://www.altova.com)-->
<cmn:DocumentList xmlns:cmn="urn:us:gov:treasury" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:schemaLocation="urn:us:gov:treasury:ginv:documents Documents_Summary.xsd">
  <cmn:Document>
    <cmn:DocumentNumber>A1610-017-017-000170</cmn:DocumentNumber>
    <cmn:Status>REC</cmn:Status>
    <cmn:LastModifiedDateTime>2017-08-28T14:05:37.534-04:00</cmn:LastModifiedDateTime>
    <cmn:URL>https://host-name:port/base-path/resource-path</cmn:URL>
    <cmn:RequestingAgencyLocationCode>00005023</cmn:RequestingAgencyLocationCode>
    <cmn:ServicingAgencyLocationCode>00005197</cmn:ServicingAgencyLocationCode>
    <cmn:DocumentType>GTC</cmn:DocumentType>
    <cmn:ModificationNumber/>
    <cmn:ManualEntryIndicator>Y</cmn:ManualEntryIndicator>
  </cmn:Document>
</cmn:DocumentList>
```



## 4 Error

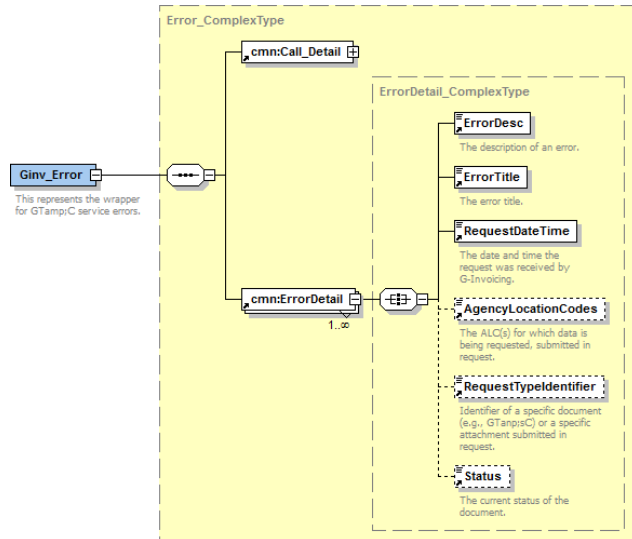

### Error Sample XML

```

<?xml version="1.0" encoding="UTF-8"?>
<!--Sample XML file generated by XMLSpy v2017 sp2 (x64) (http://www.altova.com)-->
<cmn:ErrorDetail xmlns:cmn="urn:us:gov:treasury" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:schemaLocation="urn:us:gov:treasury:ginv:error Error.xsd">
  <cmn:ErrorDesc>Unknown GTC ID provided. Correct and resubmit.</cmn:ErrorDesc>
  <cmn:ErrorTitle>400 Unknown GTC ID</cmn:ErrorTitle>
  <cmn:RequestDateTime>2017-08-28T14:05:37.534-04:00</cmn:RequestDateTime>
  <cmn:AgencyLocationCodes>00008501,00008502</cmn:AgencyLocationCodes>
  <cmn:RequestTypeIdentifier/>
  <cmn:Status>PND</cmn:Status>
</cmn:ErrorDetail>

```